

HYDROLITE-DFX™

Dual Frequency Echosounder Kit




Rugged shipping case



Sonarmite™ DFX Echosounder

BENEFITS

- ▶ Portable, integrated hydrographic survey solution
- ▶ Dual frequency
- ▶ Adapts / mounts to any vessel
- ▶ Bluetooth and serial data transfer
- ▶ Meets IP-65 standards
- ▶ Quickly export XYZ data

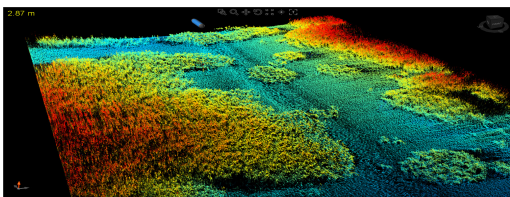

The **HydroLite-DFX™** is a portable dual frequency echosounder. The system combines both low frequency (30 kHz) and high frequency (200 kHz) transducers in one unit, penetrating through soft sediments to detect both hard bottom classification and surface layers.

SCOPE OF SUPPLY

- ▶ HydroLite-DFX Echosounder Kit
- ▶ HydroLite Boat Mount/Pole Kit
- ▶ Rugged Shipping Case
- ▶ User Manual/ Training Manual
- ▶ 1 year support and warranty

OPTIONS

- ▶ GPS/GNSS Receiver
- ▶ Digital bar check
- ▶ Tide Gauge
- ▶ Motion Sensor

ECHOSOUNDER SPECS

- ▶ Frequency: 200/30 kHz
- ▶ Beam Width: 9°/20°
- ▶ Ping Rate: 6 Hz w/ 2Hz output
- ▶ Depth Accuracy: 1cm/ 0.1% of depth
- ▶ Output formats: NMEA, ASCII, ODOM, ATLAS
- ▶ Range: 0.3 m - 200 m
- ▶ Transducer Cable: 5 m
- ▶ Power: External 12-18 vdc
- ▶ Compatibility: All Data Collectors & Acquisition Software
- ▶ DFX Topside: 1lbs (0.45kg), 6.5x3.375x1.75" (165.1x 85.72x 44.45mm)
- ▶ DFX Transducer: 8lbs, (3.62kg), 7.625x5.375x4.5" (193.67x136.52x114.3mm)
- ▶ Transom Mount: 4lbs (1.81kg), 11x5x8" (279x127x203.2mm)



Seattle 425-771-7776 | Tacoma 253-922-6087
Portland 503-641-3388 | Salt Lake City 801-878-9763
St. George 435-922-5262 | Las Vegas 702-586-1152

Boise 208-369-4388

KukerRanken.com

Seafloor Systems, Incorporated | 4415 Commodity Way | Shingle Springs, CA 95682 | USA

info@seafloor.com | www.seafloorsystems.com

REV 1/10/22